
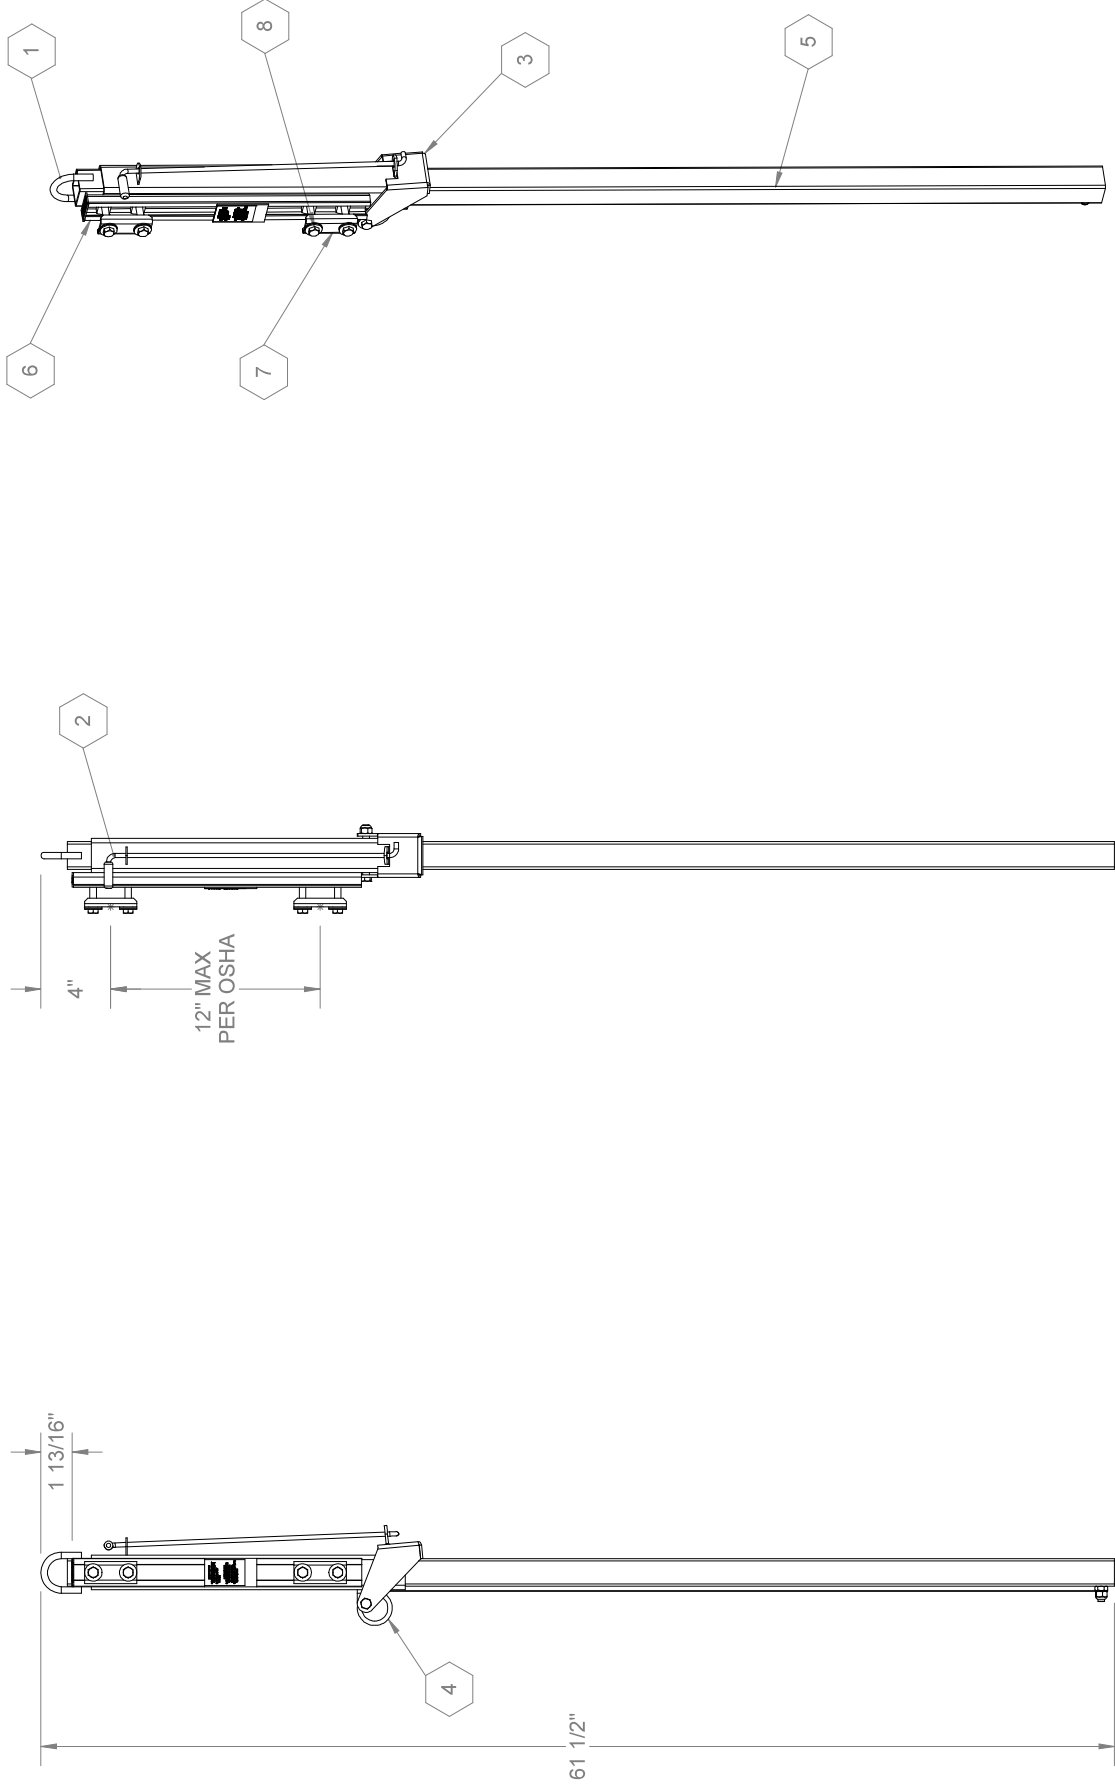


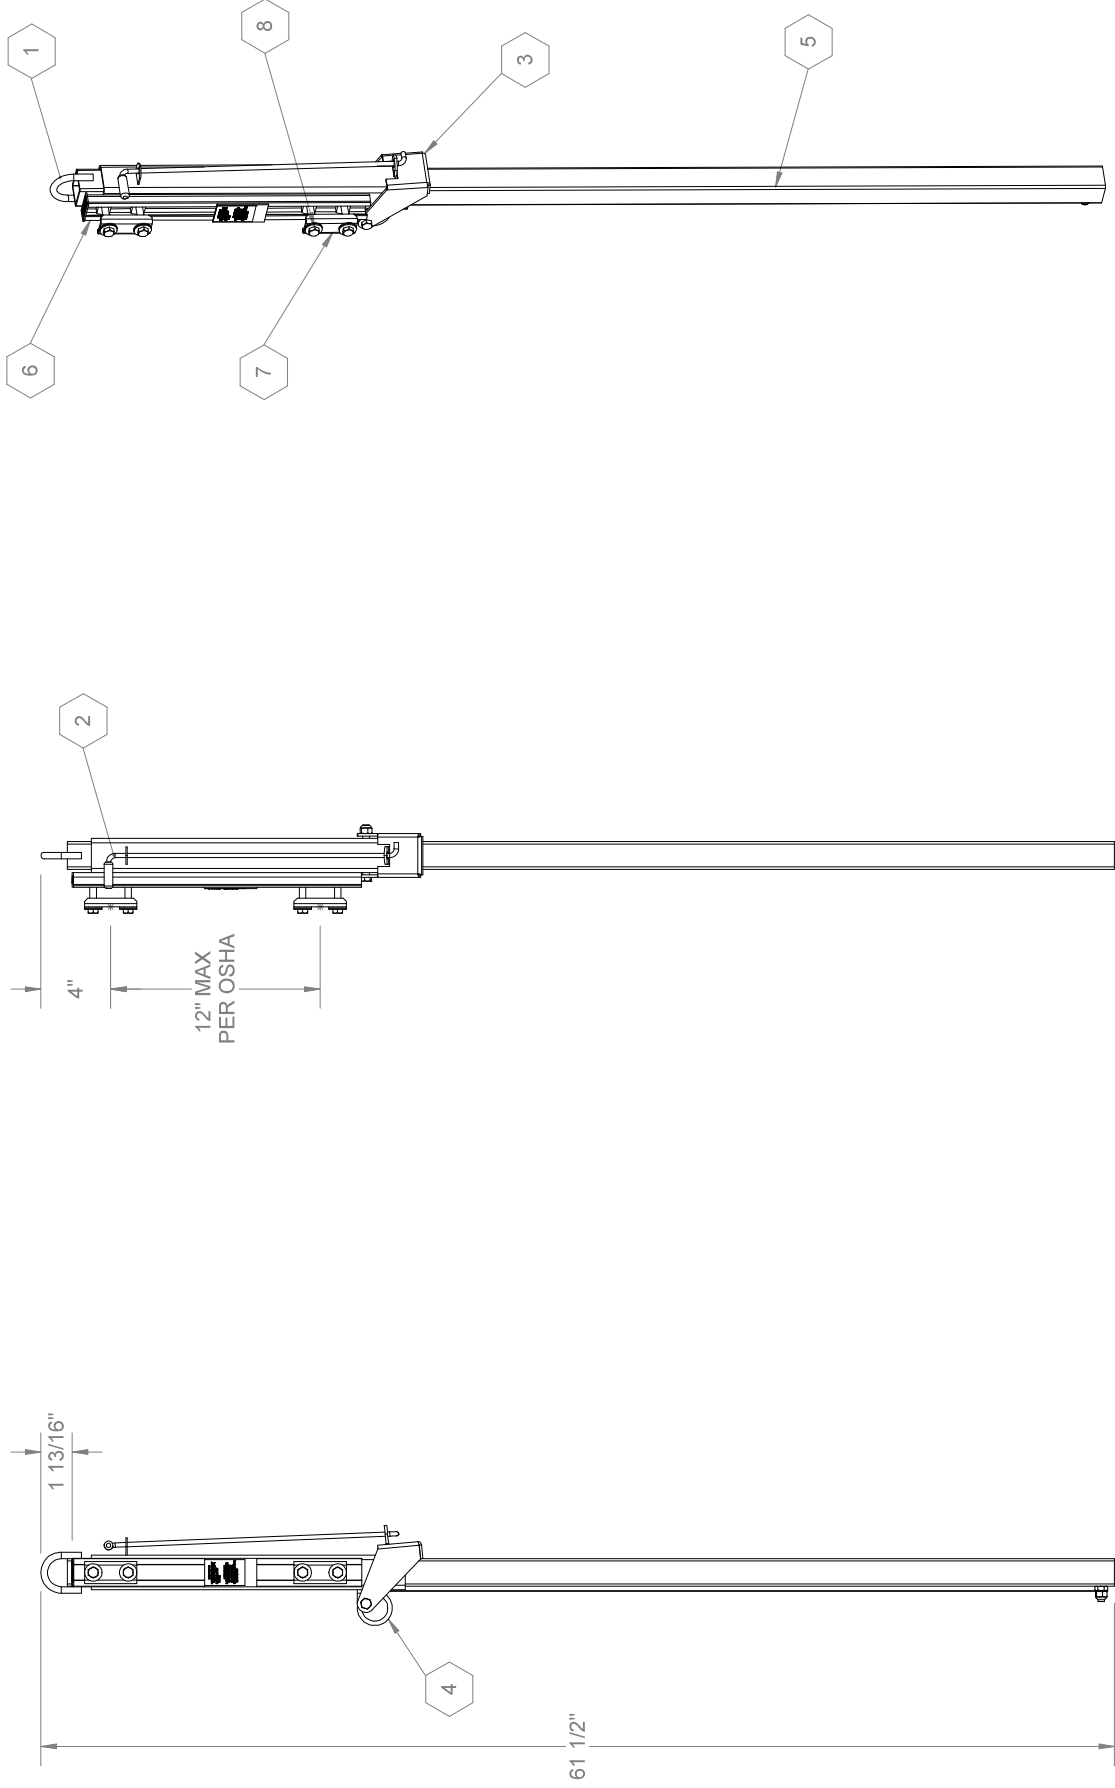

SPECIFICATIONS

- ① LIFTING HANDLE
- ② RELEASE ROD
- ③ EXTENSION LOCK BRACKET
- ④ BALANCING SPRING
- ⑤ SQUARE TUBING (1 1/2" x 1 1/2")
- ⑥ ADJUSTABLE MOUNTING CHANNEL FITS LADDER RUNG
SPACING 10"-12"
- ⑦ CLAMP BRACKET
- ⑧ STAINLESS STEEL MOUNTING HARDWARE

CERTIFICATIONS:
COMPLIES WITH OSHA 1910.29 REQUIREMENT FOR
FIXED LADDERS

DESIGN LOAD OF 200 POUNDS



	PART #	DESCRIPTION
	TBSPY	STEEL, YELLOW POWDER COAT PAINT
	TBSPG	STEEL, HOT DIPPED GALVANIZED
	TBSPA	ALUMINUM, MILL FINISH
	TBSPS	304 STAINLESS STEEL, MILL FINISH
	TBSPR	STEEL, RED POWDER COAT PAINT

PROJECT:				
ARCHITECT:				
CONTRACTOR:				
QTY:				
PART#:	TBSPY			
TITLE:		Safety Post, Ladder Access Aluminum, Safety Yellow Pwd, TRI-BUILT		
DRAWN	NAME	DATE	SIZE	DWG. NO.
RELEASED	DKL	5/16/23	A	TBSPY
				REV D

CLAMP BRACKET DETAILS

ROOF HATCH APPLICATION SAFETY POST EXTENDED

FLOOR DOOR APPLICATION SAFETY POST RETRACTED

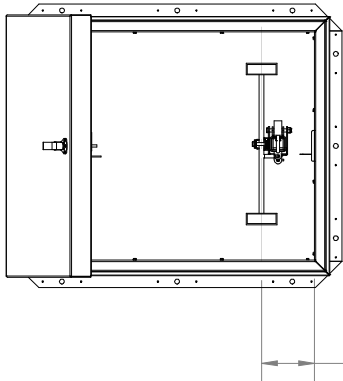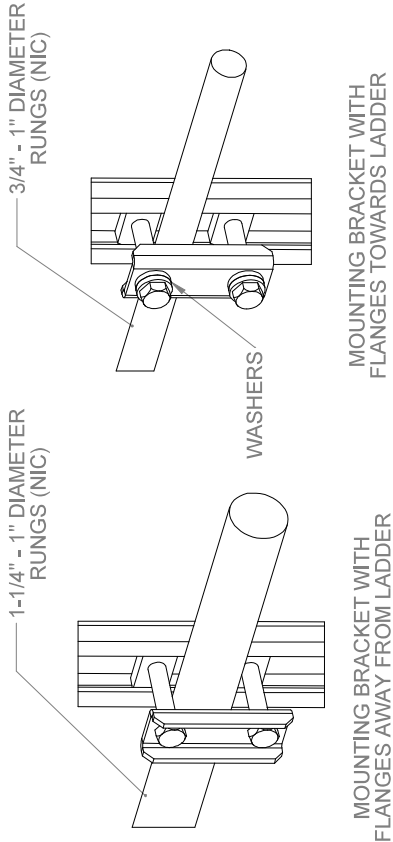

NOTES:

- CLAMP BRACKETS MAY BE REVERSED TO ACCOMMODATE RUNG SIZES OF 3/4" TO 1-1/4" WITH STANDARD 2" BOLTS FURNISHED. LARGER RUNGS WILL REQUIRE LONGER BOLTS.
- REINFORCE HOLLOW RUNG LADDERS WITH A SOLID ROUND BAR INTO THE TOP TWO RUNGS TO PROVIDE STRENGTH BEFORE MOUNTING SAFETY POST
- MOUNT THE SAFETY POST TO THE REAR OF THE LADDER WITH THE CLAMP BRACKETS ON THE CLIMBING SIDE
- RAISE SAFETY POST TO FULLY EXTENDED POSITION THE EXTERNAL LOCK BRACKET ENGAGES TO LOCK THE SAFETY POST IN PLACE. TO LOWER THE POST, LIFT UP THE RELEASE ROD AND RETRACT THE POST. HATCH AND LADDER NOT INCLUDED - SHOWN FOR SAFETY POST INSTALLATION PURPOSES ONLY.

TITLE: Safety Post, Ladder Access Aluminum, Safety Yellow Pwd, TRI-BUILT		NAME DATE		SIZE		DWG. NO.		REV	
		DRAWN		DKL		5/16/23		A	
RELEASED								TBSPY	
								D	
								SHEET 2 OF 2	