

IPS
CORPORATION



2026 Selling Guide

GALVANIZED FLASHINGS

TRI-BUILT Multi-Size 4N1® Galvanized Steel Base Roof Flashings



89248

- 20 mil galvanized steel base
- 4 sizes in 1 for on-the-job convenience — fits pipes 1-1/4" to 4"
- Can be installed on 12/12 pitch roofs or higher dependent on vent pipe size, see specification sheet
- Large base and nailing flange for extra coverage in freeze-thaw climates
- Flexible PVC collar heat tested to 180°F, conforms to vent pipe creating a water-tight seal
- Tested for ultraviolet, ozone, and weather resistance
- Limited Lifetime Warranty for life of the current roof system

IPS ITEM	QXO ITEM	DESCRIPTION	UNITS/CASE	PALLET
89248	663156	4N1 12" x 16" Base – Mill Finish	20	720
89249	663158	4N1 12" x 16" Base – Brown	20	720
89250	663159	4N1 12" x 16" Base – Black	20	720
89251	663160	4N1 12" x 16" Base – Gray	20	720

TRI-BUILT Multi-Size 3N1® Galvanized Steel Base Roof Flashings



89234

- 20 mil galvanized steel base
- Multi size flashing fits 1-1/4" to 3"
- Can be installed on 12/12 pitch roofs or higher dependent on vent pipe size, see specification sheet
- Flexible PVC collar heat tested to 180°F, conforms to vent pipe creating a water-tight seal
- Tested for ultraviolet, ozone, and weather resistance
- Limited Lifetime Warranty for life of the current roof system

IPS ITEM	QXO ITEM	DESCRIPTION	UNITS/CASE	PALLET
89234	560196	3N1 10-3/4" x 14-1/2" Base – Mill Finish	20	880
89211	560194	3N1 10-3/4" x 14-1/2" Base – Brown	20	880
89212	560193	3N1 10-3/4" x 14-1/2" Base – Black	20	880
89213	560195	3N1 10-3/4" x 14-1/2" Base – Gray	20	880

TRI-BUILT Standard Galvanized Steel Base Roof Flashings



89231


- 20 mil galvanized steel base
- Can be installed on 12/12 pitch roofs or higher dependent on vent pipe size, see specification sheet
- Flexible PVC collar heat tested to 180°F, conforms to vent pipe creating a water-tight seal
- Tested for ultraviolet, ozone, and weather resistance
- Limited Lifetime Warranty for life of the current roof system

IPS ITEM	QXO ITEM	DESCRIPTION	UNITS/CASE	PALLET
89231	560192	8-3/4" x 12-1/2" Base for 1-1/4" or 1-1/2" Vent Pipe	20	880
89232	560187	8-3/4" x 12-1/2" Base for 2" Vent Pipe	20	880
89233	560201	10 -3/4" x 14-1/2" Base for 3" Vent Pipe	20	880
89236	560202	12" x 16" Base for 4" Vent Pipe	20	880

Caution: Ensure any sealant, mastic, or adhesive used is compatible with Flexible PVC, Polypropylene, EPDM, and Silicone. Do not apply any substances on the collar portion of the flashing.

TRI-BUILT Multi-Size 4N1® Aluminium Base Roof Flashings

- 25 mil aluminum base
- 4 sizes in 1 for on-the-job convenience — fits pipes 1-1/4" to 4"
- Can be installed on 12/12 pitch roofs or higher dependent on vent pipe size, see specification sheet
- Large base and nailing flange for extra coverage in freeze-thaw climates
- Flexible PVC collar heat tested to 180°F, conforms to vent pipe creating a water-tight seal
- Tested for ultraviolet, ozone, and weather resistance
- Limited Lifetime Warranty for life of the current roof system

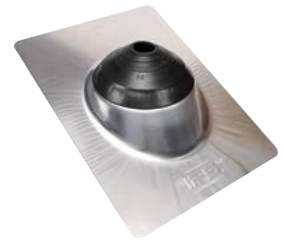

89252

IPS ITEM	QXO ITEM	DESCRIPTION	UNITS/CASE	PALLET
89252	663157	4N1 12" x 16" Base – Mill Finish	20	720
89253	663161	4N1 12" x 16" Base – Brown	20	720
89254	663162	4N1 12" x 16" Base – Black	20	720
89255	663163	4N1 12" x 16" Base – Gray	20	720

TRI-BUILT Multi-Size 3N1® Aluminium Base Roof Flashings

- 25 mil aluminum base
- Multi size flashing fits 1-1/4" to 3"
- Can be installed on 12/12 pitch roofs or higher dependent on vent pipe size, see specification sheet
- Flexible PVC collar heat tested to 180°F, conforms to vent pipe creating a water-tight seal
- Tested for ultraviolet, ozone, and weather resistance
- Limited Lifetime Warranty for life of the current roof system



89226

IPS ITEM	QXO ITEM	DESCRIPTION	UNITS/CASE	PALLET
89226	556319	3N1® 10-3/4" x 14-1/2" Base – Mill Finish	20	880
89217	560184	3 N 1® 10-3/4"x 14-1/2" Base – Brown	20	880
89218	560183	3 N 1® 10-3/4"x 14-1/2" Base – Black	20	880
89219	560185	3 N 1® 10-3/4" x 14-1/2" Base – Gray	20	880

TRI-BUILT Standard Aluminium Base Roof Flashings

- 25 mil aluminum base
- Can be installed on 12/12 pitch roofs or higher dependent on vent pipe size, see specification sheet
- Flexible PVC collar heat tested to 180°F, conforms to vent pipe creating a water-tight seal
- Tested for ultraviolet, ozone, and weather resistance
- Limited Lifetime Warranty for life of the current roof system




89223

IPS ITEM	QXO ITEM	DESCRIPTION	UNITS/CASE	PALLET
89223	560182	8-3/4" x 12-1/2" Base for 1-1/4" or 1-1/2" Vent Pipe	20	1200
89224	560186	8-3/4" x 12-1/2" Base for 2" Vent Pipe	20	1200
89225	560191	10-3/4" x 14-1/2" Base for 3" Vent Pipe	20	880
89228	556322	12" x 16" Base for 4" Vent Pipe	20	720

Caution: Ensure any sealant, mastic, or adhesive used is compatible with Flexible PVC, Polypropylene, EPDM, and Silicone. Do not apply any substances on the collar portion of the flashing.

HARD PLASTIC FLASHINGS

TRI-BUILT Multi-Size 4N1™ Hard Plastic Base Roof Flashings

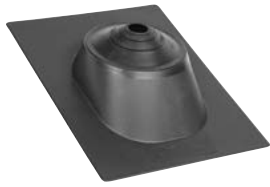

89245

- Thermoplastic hard base
- 4 sizes in 1 for on-the-job convenience — fits pipes 1-1/4" to 4"
- Can be installed on 12/12 pitch roofs or higher dependent on vent pipe size, see specification sheet
- Larger base for extra coverage (12" x 16")
- Flexible PVC collar heat tested to 180°F, conforms to vent pipe creating a water-tight seal
- Tested for ultraviolet, ozone, and weather resistance
- Limited Lifetime Warranty for life of the current roof system

IPS ITEM	QXO ITEM	DESCRIPTION	UNITS/CASE	PALLET
89245	663153	4N1 Hardbase Flashing	20	1080

TRI-BUILT Multi-Size 3N1™ Hard Plastic Base Roof Flashings



89237

- Thermoplastic hard base
- Multi-size fits 1-1/4" to 3"
- Can be installed on 12/12 pitch roofs or higher dependent on vent pipe size, see specification sheet
- Flexible PVC collar heat tested to 180°F, conforms to vent pipe creating a water-tight seal
- Tested for ultraviolet, ozone, and weather resistance
- Limited Lifetime Warranty for life of the current roof system

IPS ITEM	QXO ITEM	DESCRIPTION	UNITS/CASE	PALLET
89237	560203	3N1® 11-1/8" x 15" Base	20	1200

FLEXIBLE FLASHINGS

TRI-BUILT Standard All Flexible Roof Flashings



89229

- All flexible, one-piece base and collar
- Can be installed on 12/12 pitch roofs or higher dependent on vent pipe size, see specification sheet
- Flexible PVC heat tested to 180°F, conforms to vent pipe creating a water-tight seal
- Tested for ultraviolet, ozone, and weather resistance
- Limited Lifetime Warranty for life of the current roof system

IPS ITEM	QXO ITEM	DESCRIPTION	UNITS/CASE	PALLET
89229	600948	9" x 11 3/8" Base for 1-1/4" or 1-1/2" Vent Pipe	20	1540
89230	600949	9" x 11 3/8" Base for 2" Vent Pipe	20	1540

Caution: Ensure any sealant, mastic, or adhesive used is compatible with Flexible PVC, Polypropylene, EPDM, and Silicone. Do not apply any substances on the collar portion of the flashing.

TRI-BUILT Metal Roof Flashings

- **Sleeve Flexibility:** Absorbs vibration and pipe movement caused by expansion/contraction
- **Easy On-site Customization:** Can accommodate all normal installations
- **Adaptable Base:** Designed to mold to most panel configurations and roof pitches regardless of pipe location
- **Weather Protection:** Made of EPDM or high-temperature silicone, these flashings are compounded specifically for maximum resistance to weathering due to ozone and ultraviolet light
- **Fits any metal roof pitch to 45° for Square Base and 40° for Round Base**
- **EPDM is Lab Tested and certified: IAPMO PS64-2012ea1**

IPS ITEM	QXO ITEM	DESCRIPTION	UNITS/CASE	PALLET
Square Base				
88950	828290	#3, Gray, EPDM, for pipe sizes 0"-5-3/4"	10	1050
88966	854491	#4, Gray, EPDM, for pipe sizes 2-3/4"-7"	10	
88967	854492	#5, Gray, EPDM, for pipe sizes 3-3/4"-7-3/4"	10	
88951	828291	#6, Gray, EPDM, for pipe sizes 4-3/4"-10"	10	
88968	854493	#7, Gray, EPDM, for pipe sizes 6"-11"	10	
88952	828292	#3, Black, EPDM, for pipe sizes 0"-5-3/4"	6	1050
88969	854494	#4, Black, EPDM, for pipe sizes, 2-3/4-7"	10	
88970	854495	#5, Black, EPDM, for pipe sizes, 3-3/4"-7-3/4"	10	
88953	828293	#6, Black, EPDM, for pipe sizes 3-3/4"-7-3/4"	10	
88971	854496	#7, Black, EPDM, for pipe sizes, 6-11"	10	
88954	828295	#3, Terra Cotta, Silicone, for pipe sizes 0"-5-3/4"	6	1050
88972	854497	#4, Terra Cotta, Silicone, for pipe sizes 2-3/4-7"	6	
88973	854498	#3, Black, Silicone, for pipe sizes 0-5-3/4",	6	1050
88974	854499	#4, Black, Silicone, for pipe sizes 2-3/4-7"	6	
Round Base				
88955	828296	#1, Gray, EPDM, for pipe sizes 0"-2-3/8"	10	240
88956	828297	#2, Gray, EPDM, for pipe sizes 1-3/4"-3"	10	240
88957	828298	#3, Gray, EPDM, for pipe sizes 0"-5"	10	1000
88975	854517	#4, Gray, EPDM, for pipe sizes, 3"-6-1/4"	10	240
88976	854518	#5, Gray, EPDM, for pipe sizes, 4-1/2"-7-1/2"	10	240
88958	828299	#6, Gray, EPDM, for pipe sizes 5"-9"	10	240
88977	854519	#7, Gray, EPDM, for pipe sizes 6"-11"	10	240
88959	828300	#1, Black, EPDM, for pipe sizes 0"-2-3/8"	10	
88960	828301	#2, Black, EPDM, for pipe sizes 1-1/4"-3"	10	
88961	828302	#3, Black, EPDM, for pipe sizes 0"-5"	10	1000
88978	854520	#4, Black, EPDM, for pipe sizes 3"-6-1/4"	10	
88979	854521	#5, Black, EPDM, for pipe sizes 3-1/2"-7-3/4"	10	
88962	828303	#6, Black, EPDM, for pipe sizes 5"-9"	10	
88980	854522	#7, Black, EPDM, for pipe sizes 6"-11"	10	
88963	828304	#3, Terra Cotta, Silicone, for pipe sizes 0"-5"	6	
88981	854523	#5, Terra Cotta, Silicone, for pipe sizes 4-1/2"-7-1/2"	6	
88984	854524	#3, Black, Silicone, for pipe sizes 0-5"	6	
88985	854525	#5, Black, Silicone, for pipe sizes 4-1/2"-7-1/2"	6	



88954



88957



88961

METAL ROOF FLASHINGS



88964

IPS ITEM	QXO ITEM	DESCRIPTION	UNITS/ CASE	PALLET
Retro Fit Round Base				
88986	854526	#1, Gray, EPDM, for pipe sizes 3/4"-3-3/4"	10	
88964	828305	#2, Gray, EPDM, for pipe sizes 2"-7-1/4"	10	
88987	854527	#3, Gray, EPDM, for pipe sizes 3-1/4"-10"	10	
88988	854528	#1, Black, EPDM, for pipe sizes 3/4"-3-3/4"	10	480
88965	828306	#2, Black, EPDM, for pipe sizes 2"-7-1/4"	10	240
88989	854529	#3, Black, EPDM, for pipe sizes 3-1/4"-10"	10	

RAIN COLLARS

TRI-BUILT Multi-Size 4N1™ Rain Collar



89246

- Can be used to repair the elastomer sealing collar on all types of residential "no caulk" roof vent flashings quickly and easily
- Eliminates the need for a mastic or caulking type messy repair job
- Can be used to instantly repair a leak during a wet period, until the flashing can be replaced at a later time
- Large size covers the entire existing elastomer collar
- Fully tested for ultraviolet, ozone and weather resistance
- Individual sizes and multi-size adjustable models available
- Better appearance than a mastic

IPS ITEM	QXO ITEM	DESCRIPTION	UNITS/ CASE	PALLET
89246	663164	4N1® Collar for 1-1/4", 1-1/2", 2", 3" or 4" Vent Pipe	20	4200

Caution: Ensure any sealant, mastic, or adhesive used is compatible with Flexible PVC, Polypropylene, EPDM, and Silicone. Do not apply any substances on the collar portion of the flashing.

TYPE B VENTILATION

TRI-BUILT Type B Vent Flashings



89355

- 28 gauge G-90 ASTM-A653 CS Galvanized steel
- Conical shape allows adjusting from 0/12 to 8/12 roof pitch
- Steep pitch models adjust from 8/12 to 12/12 roof pitch
- Cone and base seams have sealant on the inside of flashing
- Complies with ANSI / UL 441

IPS ITEM	QXO ITEM	DESCRIPTION	UNITS/ CASE	PALLET
89353	815897	3" Type B Flashing	12	384
89354	815898	4" Type B Flashing	12	384
89355	815899	5" Type B Flashing	12	384
89356	815900	6" Type B Flashing	12	384
89357	815901	7" Type B Flashing	6	96
89358	815902	8" Type B Flashing	6	96
89363	815903	3" Type B Flashing – Steep Pitch	12	384
89364	815904	4" Type B Flashing – Steep Pitch	12	384

TRI-BUILT Multi-Cap™ Type B Vent Caps

- Recommended for flue, hot stack, or Type B installations
- Constructed from heavy-duty aluminum for durability
- Resists rust and corrosion, ensuring long-lasting performance
- Prevents weather, debris, and birds from entering the flue
- Non-clogging positive draft design
- Clamp fittings adjustable for all standard sizes
- Aluminum construction
- Complies with ANSI / UL 441



89256

IPS ITEM	QXO ITEM	DESCRIPTION	UNITS/ CASE	PALLET
89256	692792	Type B-Vent Cap, for outside diameter of 2-7/8" to 4-7/8"	12	216
89257	692793	Type B-Vent Cap, for outside diameter of 4-7/8" to 6-7/8"	12	96
89258	692794	Type B-Vent Cap, for outside diameter of 6-7/8" to 8-7/8"	12	96
89259	692795	Type B-Vent Cap, for outside diameter of 8-7/8" to 10-7/8"	1	63
89260	692796	Type B-Vent Cap, for outside diameter of 11-7/8" to 14"	1	28

TRI-BUILT Type B Vent Adjustable Storm Collars

- 28 gauge G-90 ASTM-A653 CS Galvanized steel
- Adjustable slip fit tab provides snug fit around vent
- Locking tab secures installation
- 7"-9" storm collar accommodates multi-sizes.
- Complies with ANSI / UL 441



89365

IPS ITEM	QXO ITEM	DESCRIPTION	UNITS/ CASE	PALLET
89365	815905	3" Type Adj Storm Collar	24	216
89366	815906	4" Type Adj Storm Collar	24	96
89367	815907	5" Type Adj Storm Collar	24	96
89368	815908	6" Type Adj Storm Collar	24	63
89369	815909	7-9" Type Adj Storm Collar	24	28

TRI-BUILT Stamped Storm Collar

- Works with Type B Vent flashing
- Provides a waterproof seal at roof stack penetration
- Storm collar is installed and sealed above the flashing
- 28 gauge G-90 ASTM-A653 CS Galvanized steel
- Complies with ANSI / UL 441



89376

IPS ITEM	QXO ITEM	DESCRIPTION	UNITS/ CASE	PALLET
89376	817037	3" Type B Storm Collar Stamped	24	2880
89377	817038	4" Type B Storm Collar Stamped	24	2880
89390	817039	5" Type B Storm Collar Stamped	24	1920
89391	817040	6" Type B Storm Collar Stamped	24	1920

SPECIALTY ROOFING PRODUCTS

TRI-BUILT Multi-Size 3-8 Flashing



89395

- For pipe sizes 3"–8"
- Sleeve flexibility absorbs vibration and pipe movement caused by expansion/contraction
- Made of EPDM which are compounded specifically for maximum resistance to weathering due to ozone and ultraviolet light
- Easy on-site customization with pull tab design can accommodate all normal installation
- 20° pitch to accommodate 12/12 roof pitch
- Large footprint 22 gauge dead soft aluminum base
- EPDM is lab tested and certified: IAPMO PS64-2012ea1

IPS ITEM	QXO ITEM	DESCRIPTION	UNITS/ CASE	PALLET
89395	828308	3-8", 20x24" Dead Soft Aluminum Base	10	200

TRI-BUILT Electrical Mast Roof Flashing



89291

- Constructed of UV stabilized flexible PVC with proven track record of 40 years
- Equipped with multi-piece stainless steel clamps
- Tongue and groove design for increased weather protection
- Limited Lifetime Warranty for life of the current roof system
- Available in two sizes

IPS ITEM	QXO ITEM	DESCRIPTION	UNITS/ CASE	PALLET
89291	711395	Electrical Mast RetroFit Roof Flashing, 0 to 3-1/2" – 13-1/4" x 11" Base	15	540
89292	711392	Electrical Mast RetroFit Roof Flashing, 0 to 5" – 14" x 15" Base	15	405

Caution: Ensure any sealant, mastic, or adhesive used is compatible with Flexible PVC, Polypropylene, EPDM, and Silicone. Do not apply any substances on the collar portion of the flashing.

TRI-BUILT High Performance Flashing



89397



89399

- Made from a UV stabilized polymer for enhanced durability
- Installs in minutes, no tools required
- Available in black or brown to match a variety of roofing materials
- Suitable for asphalt shingles, wood shake, slate, and composite roofing materials

IPS ITEM	QXO ITEM	DESCRIPTION	UNITS/ CASE	PALLET
Repair				
89397	858445	3N1® Black Perma-Boot Repair	10	240
89396	858444	4" Black Perma-Boot Repair	10	240
New Construction				
89399	858442	3N1® Black Perma-Boot New Construction	5	100
89398	858443	4" Black Perma-Boot New Construction	10	160

SMARTVENT™ ATTIC INTAKE & EXHAUST

TRI-BUILT SmartVent

- Use on eaves, mid-roof, off-wall, shed-wall, off-peak, dormer and valley
- Intake or exhaust for all climates
- 9 square inches of NFA per linear foot (18 when used on both sides)
- Tapered for a natural look
- Fabric Weather Guard protects against rain and snow infiltration
- Nail gunable and cuts with utility knife

IPS ITEM	QXO ITEM	DESCRIPTION	UNITS/ CASE	PALLET
89261	692790	SmartVent™ Intake and Exhaust Vent (3' per unit)	18	504



89261

TRI-BUILT SmartVent Tapered End Caps


- Provides a perfectly tapered end to SmartVent™
- Eliminates the need to fabricate end caps on the job
- Fabric Weather Guard protects against rain and snow infiltration
- Creates a watertight seal as the shingles slope down
- Universal pieces install on right side or left side of the SmartVent run




89262

IPS ITEM	QXO ITEM	DESCRIPTION	UNITS/ CASE	PALLET
89262	692791	SmartVent™ Intake and Exhaust Vent End Caps	12	324


Mid-Roof

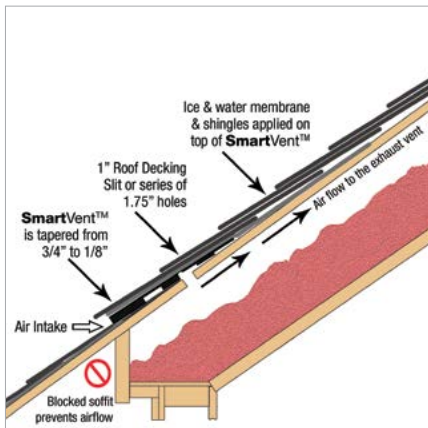


Off-Peak

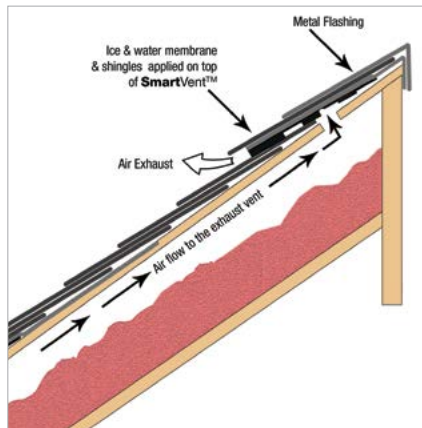


Dormer

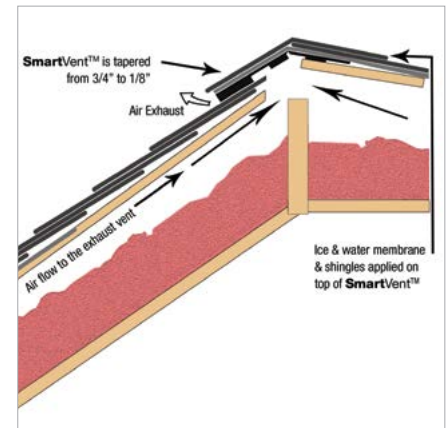

Eave

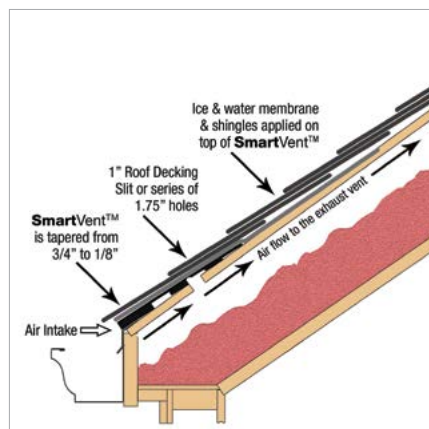


Shed-Wall

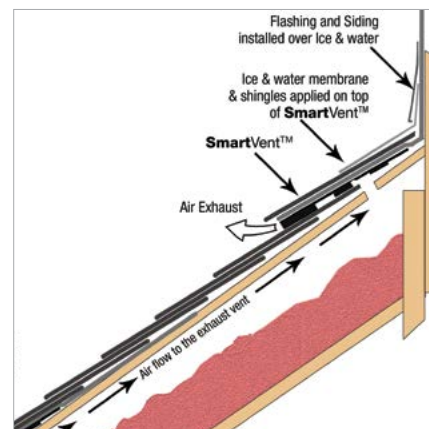

SnapCap™

Bathroom, Kitchen, & Dryer Exhaust Vent Cap

SnapCap™ is the highest performance, most versatile bathroom, kitchen, and dryer exhaust vent cap available. Equipped with a counterbalanced damper, SnapCap works with any CFM fan and provides a secure connection to 3", 4" and 6" flexible or rigid duct. SnapCap™ is constructed of heavy gauge galvanized steel to provide unmatched durability and is backed by a Life of the Roof™ warranty. Each SnapCap™ package includes an adapter set and cable tie.

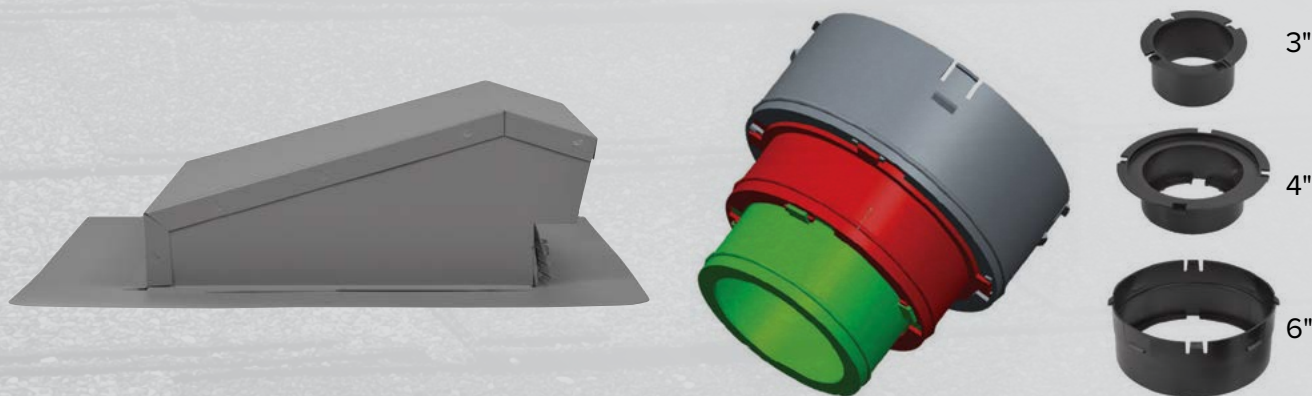


Low-Profile, Durable Gauge Design


SnapCap™ has a lower profile on the roof and a heavier gauge base and housing for improved aesthetics and increased performance. SnapCap™ is available in galvanized steel.

Easy "Snap-In" Installation

SnapCap™ adapters easily snap into the vent cap for a secure connection.

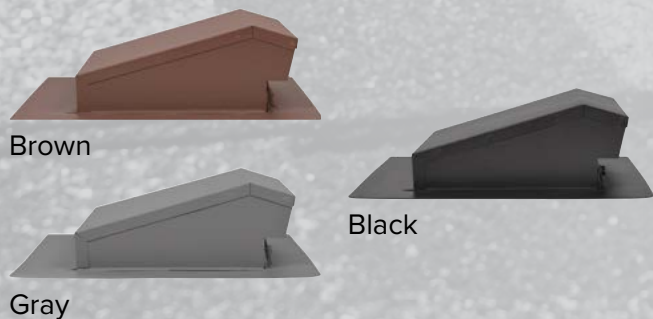


Easily connect ductwork with a cable tie, duct tape, or a sheet metal screw

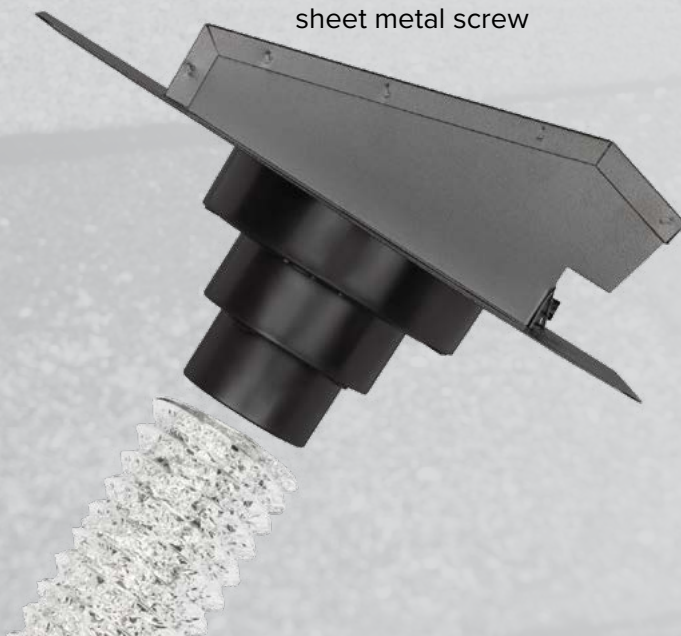

Three Powder-Coated Finishes Available

SnapCap™ is available in Brown, Black, and Gray to match most roofing systems.

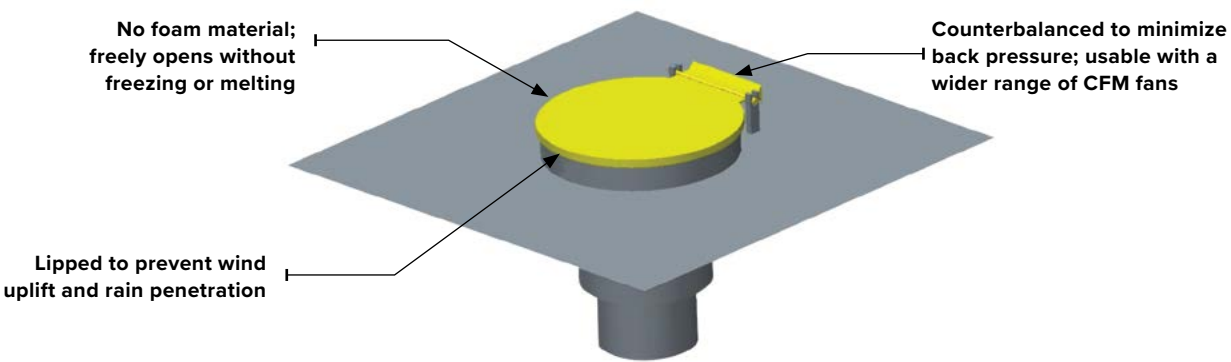

TRI-BUILT Galvanized Steel SnapCap™

- All-Flow™ capability: patented counterbalanced damper works with any CFM fan
- 3", 4", & 6" adapters for multiple application sizes
- Heavy gauge flange and housing
- Three powder coated finishes available
- Adapter set and cable tie included with each SnapCap™



89239

IPS ITEM	QXO ITEM	DESCRIPTION	UNITS/ CASE	PALLET
89239	636104	 SnapCap – Brown Galvanized Steel	1	72
89240	636103	 SnapCap – Black Galvanized Steel	1	72
89243	636105	 SnapCap – Gray Galvanized Steel	1	72



IPS Corporation

500 Distribution Parkway
Collierville, TN 38017

800-888-8312
901-853-5008 fax

IPSRoofing.com

ips.roofing@ipscorp.com